


# SHAKER

## WHITE OAK 1 PANEL – INTERNAL DOOR

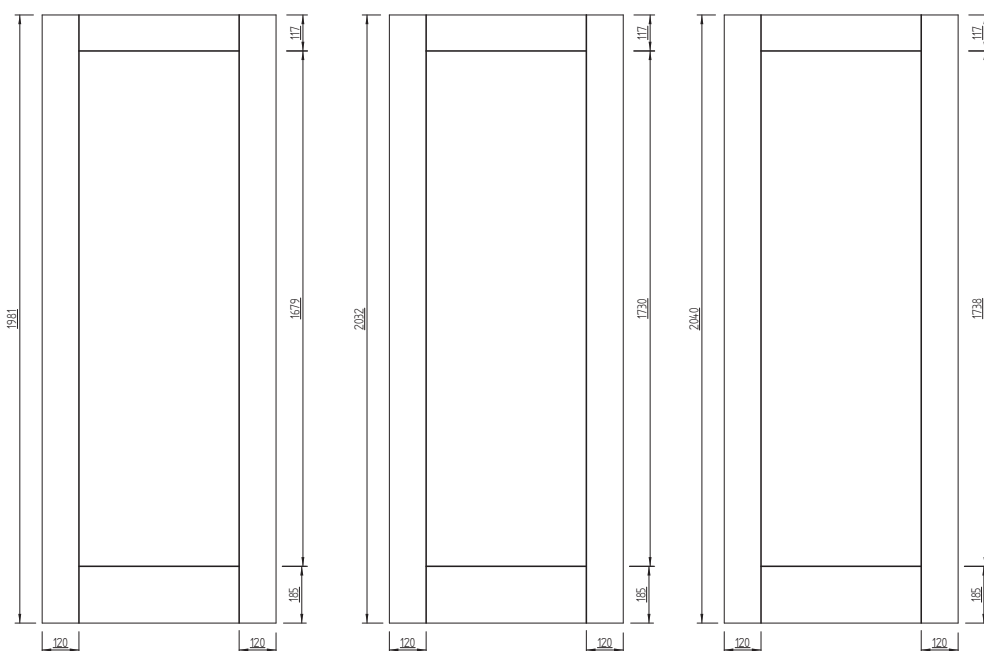

### SPECIFICATIONS

**Veneer Species:**

American white oak

**Veneer Thickness:**

0.6mm

**Edge Lippings:**

10mm KSK

**Top & Bottom Lippings:**

10mm KSK

**Panel Thickness:**

12mm Particle board

**Profile:**

90° square

**Stile & Rail Core:**

Particle board

**Construction:**

Tongue & groove joint with dowel and glue

**Glazing:**

N/A

**Packaging:**

Shrinkwrap with plastic edge corner protectors.

A4 paper fitting instruction




5 year guarantee against manufacturing defects

# SHAKER

## WHITE OAK 4 PANEL

### – INTERNAL DOOR

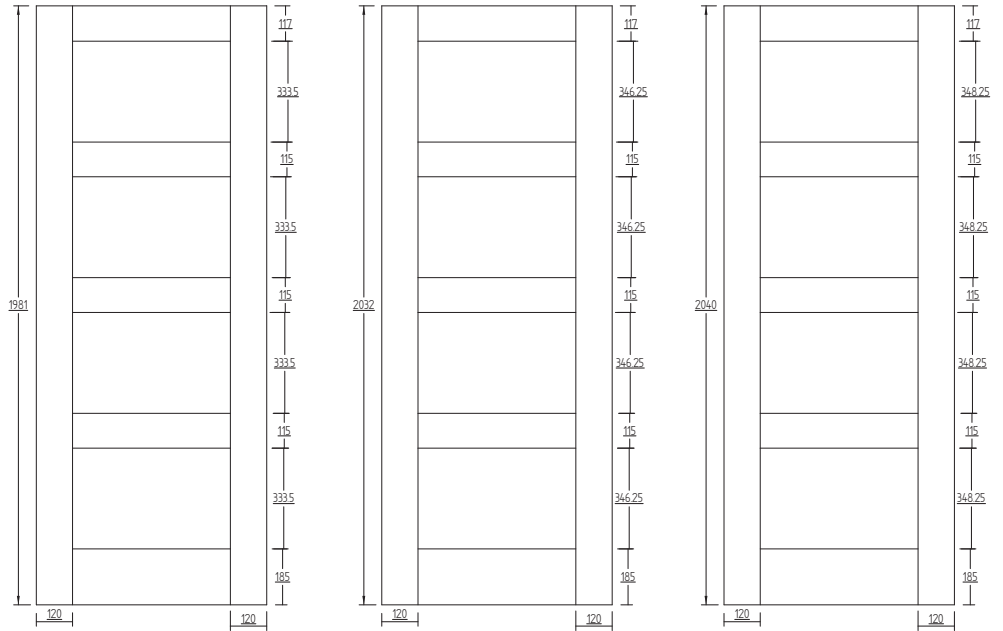

## SPECIFICATIONS

**Veneer Species:**  
American white oak

**Veneer Thickness:**  
0.6mm

**Edge Lippings:**  
10mm KSK

**Top & Bottom Lippings:**  
10mm KSK

**Panel Thickness:**  
12mm Particle board

**Profile:**  
90° square

**Stile & Rail Core:**  
Particle board

**Construction:**  
Tongue & groove joint with dowel and glue

**Glazing:**  
N/A


**Packaging:**  
Shrinkwrap with plastic edge corner protectors.  
A4 paper fitting instruction



5 year guarantee  
against manufacturing  
defects

# SHAKER

## WHITE OAK 4 PANEL FD30 44mm – INTERNAL FIRE DOOR

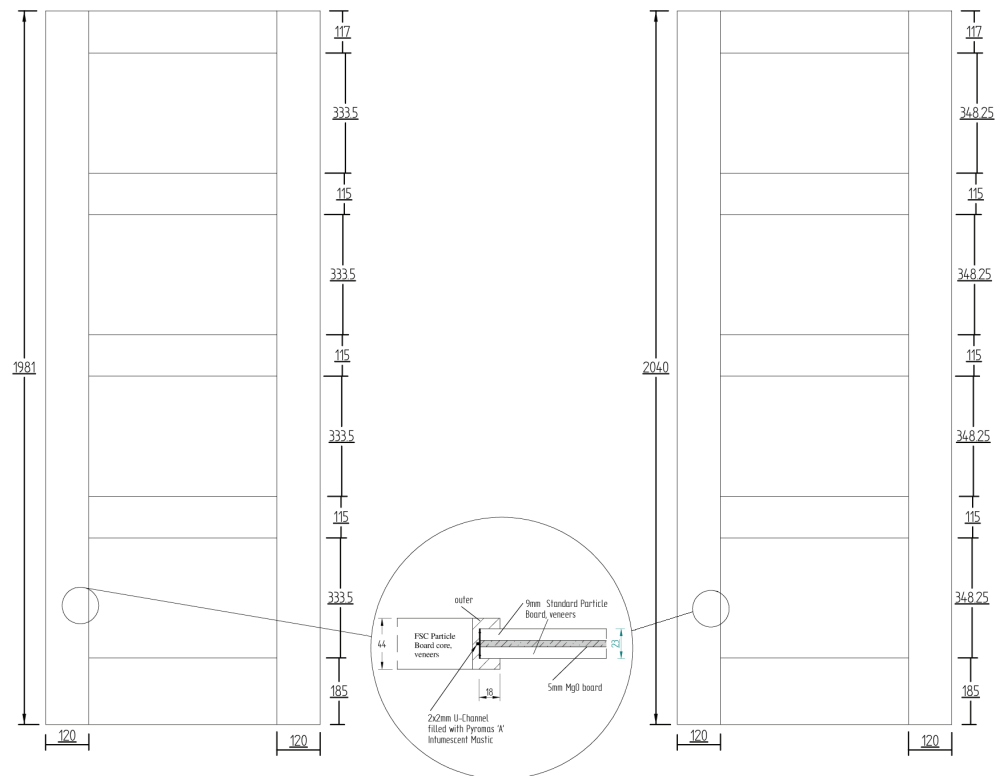

### SPECIFICATIONS

**Veneer Species:**

American white oak

**Veneer Thickness:**

0.6mm

**Edge Lippings:**

15mm American white oak

**Top & Bottom Lippings:**

15mm American white oak

**Panel Thickness:**

23mm Particle board / MGO board

**Profile:**

90° square

**Stile & Rail Core:**

Particle board

**Construction:**

Tongue & groove joint with dowel and glue

**Glazing:**

N/A

**Packaging:**

Shrinkwrap with plastic edge corner protectors.

A4 paper fitting instruction

BWF-Certifire label to top edge




5 year guarantee  
against manufacturing  
defects

# SHAKER

## RECESSED COTTAGE PANEL

### – INTERNAL DOOR

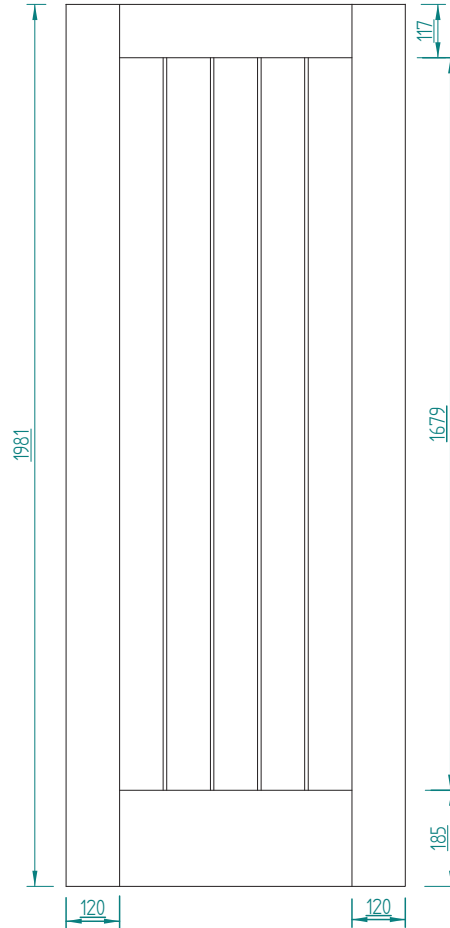

## SPECIFICATIONS

### Veneer Species:

American white oak

### Veneer Thickness:

0.6mm

### Edge Lippings:

10mm KSK

### Top & Bottom Lippings:

10mm KSK

### Panel Thickness:

15mm Particle board

### Profile:

6mm x 4mm U groove

### Stile & Rail Core:

Particle board

### Construction:

Tongue & groove joint with dowel and glue

### Glazing:

N/A

### Packaging:

Shrinkwrap with plastic edge corner protectors.


A4 paper fitting instruction



5 year guarantee against manufacturing defects

# SHAKER

## WHITE OAK 1 LIGHT CLEAR GLAZED – INTERNAL DOOR

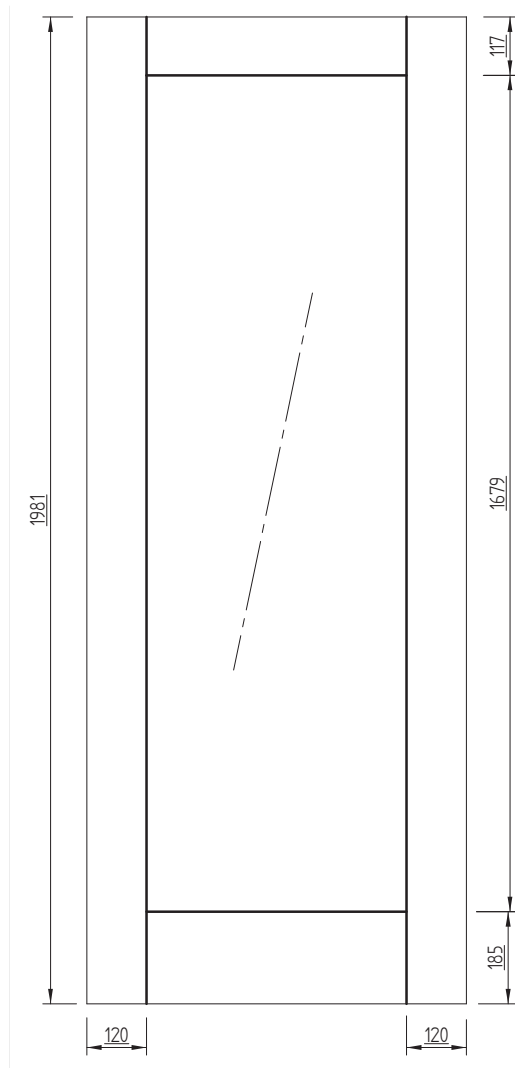

### SPECIFICATIONS

**Veneer Species:**

American white oak

**Veneer Thickness:**

0.6mm

**Edge Lippings:**

10mm KSK

**Top & Bottom Lippings:**

10mm KSK

**Panel Thickness:**

N/A

**Profile:**

90° square

**Stile & Rail Core:**

Particle board

**Construction:**

Tongue & groove joint with dowel and glue

**Glazing:**

4mm clear or etched toughened with paint & peel film

**Packaging:**

Shrinkwrap with plastic edge corner protectors.


A4 paper fitting instruction



5 year guarantee  
against manufacturing  
defects

# SHAKER

## WHITE OAK 4 LIGHT CLEAR GLAZED – INTERNAL DOOR

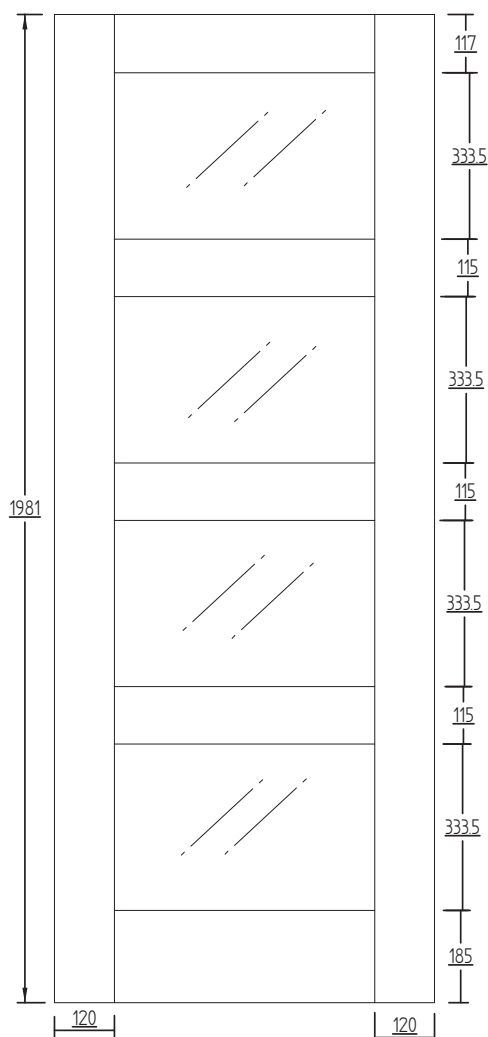

### SPECIFICATIONS

**Veneer Species:**

American white oak

**Veneer Thickness:**

0.6mm

**Edge Lippings:**

10mm KSK

**Top & Bottom Lippings:**

10mm KSK

**Panel Thickness:**

N/A

**Profile:**

90° square

**Stile & Rail Core:**

Particle board

**Construction:**

Tongue & groove joint with dowel and glue

**Glazing:**

4mm clear toughened with paint & peel film

**Packaging:**

Shrinkwrap with plastic edge corner protectors.


A4 paper fitting instruction



5 year guarantee  
against manufacturing  
defects

# SHAKER

## MACKINTOSH WHITE OAK 4 LIGHT – INTERNAL DOOR

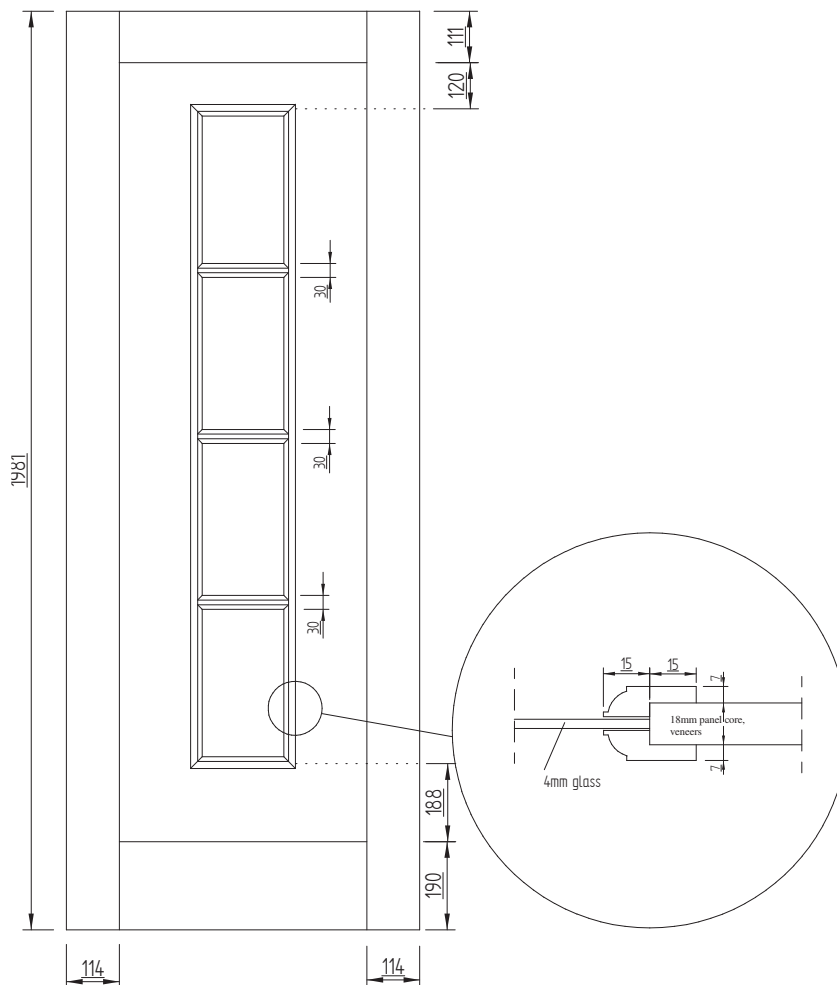

### SPECIFICATIONS

**Veneer Species:**

American white oak

**Veneer Thickness:**

0.6mm

**Edge Lippings:**

10mm KSK

**Top & Bottom Lippings:**

10mm KSK

**Panel Thickness:**

19mm Particle board or MDF

**Profile:**

90° square

**Stile & Rail Core:**

Particle board

**Construction:**

Tongue & groove joint with dowel and glue

**Glazing:**

4mm decorative toughened

**Packaging:**

Shrinkwrap with plastic edge corner protectors.

A4 paper fitting instruction



5 year guarantee against manufacturing defects