

LAMINATE FLUSH DOOR

35mm STANDARD CORE

– INTERNAL DOOR

JELD WEN

SPECIFICATIONS

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a Cellular core.

Door Codes

Corbridge Oak	COHWS
Carini Walnut	CWHWS
Denver Oak	DOHWS
Sorano Oak	SOHWS
Whiteriver Oak	WOHWS
Gladstone Oak	GOHWS
Fineline Cream	FCHWS

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 28mm (nominal width)
Rails:	Softwood 28mm (nominal width)
Core:	Cellular
Lockblock:	Chipboard
Lipping:	N/A

Lock Area

A lock-block is positioned centrally to one side of the door which is indicated by the word "LOCK" to the top edge. This is an area of 320mm high x 55mm wide.

Finish

Fully finished no further decoration is required to the faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge. The top of the door should not be trimmed due to the manufacturing identifications.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

40mm STANDARD CORE

– INTERNAL DOOR

JELD WEN®

SPECIFICATIONS

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a Cellular core.

Door Codes

Corbridge Oak	COHWS
Carini Walnut	CWHWS
Denver Oak	DOHWS
Sorano Oak	SOHWS
Whiteriver Oak	WOHWS
Gladstone Oak	GOHWS
Fineline Cream	FCHWS

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 30mm (nominal width)
Rails:	Softwood 30mm (nominal width)
Core:	Cellular
Lockblock:	Chipboard
Lipping:	N/A

Lock Area

A lock-block is positioned centrally to one side of the door which is indicated by the word "LOCK" to the top edge. This is an area of 320mm high x 60mm wide.

Finish

Fully finished no further decoration is required to the faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge. The top of the door should not be trimmed due to the manufacturing identifications.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

35mm HEAVYWEIGHT CORE

– INTERNAL DOOR

JELD WEN

SPECIFICATIONS

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a heavyweight solid core.

Door Codes

Corbridge Oak	COHWHWS
Carini Walnut	CWHWHWS
Denver Oak	DOHWHWS
Sorano Oak	SOHWHWS
Whiteriver Oak	WOHWHWS
Gladstone Oak	GOHWHWS
Fineline Cream	FCHWHWS

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 28mm (nominal width)
Rails:	Softwood 28mm (nominal width)
Core:	Flaxboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles maybe fitted centrally in height either side of the door.

Finish

Fully finished no further decoration is required to the faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge. The top of the door should not be trimmed due to the manufacturing identifications.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core.

Door Codes

Corbridge Oak	COFHWS
Carini Walnut	CWFHWS
Denver Oak	DOFHWS
Sorano Oak	SOFHWS
Whiteriver Oak	WOFHWS
Gladstone Oak	GOFHWS
FineLine Cream	FCFHWS

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door, maximum dimensions specified on installation instructions provided.

Finish

Fully finished no further decoration is required to the faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge. The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Cutting of apertures or glazing on site is not permitted and invalidates the fire certification.

Third party BWF-Certifire licensed processors are able to complete this ancillary work when required.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year.

We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

FD60 54mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD60 54mm 60minute to BS476:Part 22: 1987 (CERTIFIRE CF179).

Construction

Flush CPL laminate faced door, with hardwood stiles and rails, and a Magnesium Oxide core.

Door Codes

Corbridge Oak	COCPLFD
Carini Walnut	CWCPLFD
Denver Oak	DOCPLFD
Sorano Oak	SOCPLFD
Whiteriver Oak	WOCPLFD
Gladstone Oak	GOCPFLD
Fineline Cream	FCCPLFD

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 48mm (Nominal)
Rails:	Hardwood 48mm (Nominal)
Core:	Magnesium Oxide Core
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge. The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 60 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Cutting of apertures or glazing on site is not permitted and invalidates the fire certification.

Third party BWF-Certifire licensed processors are able to complete this ancillary work when required.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year.

We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

G01 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core.

Door Codes

Corbridge Oak	COFHWS+G01
Carini Walnut	CWFHWS+G01
Denver Oak	DOFHWS+G01
Sorano Oak	SOFHWS+G01
Whiteriver Oak	WOFHWS+G01
Gladstone Oak	GOFHWS+G01
FineLine Cream	FCFHWS+G01

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.


Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.

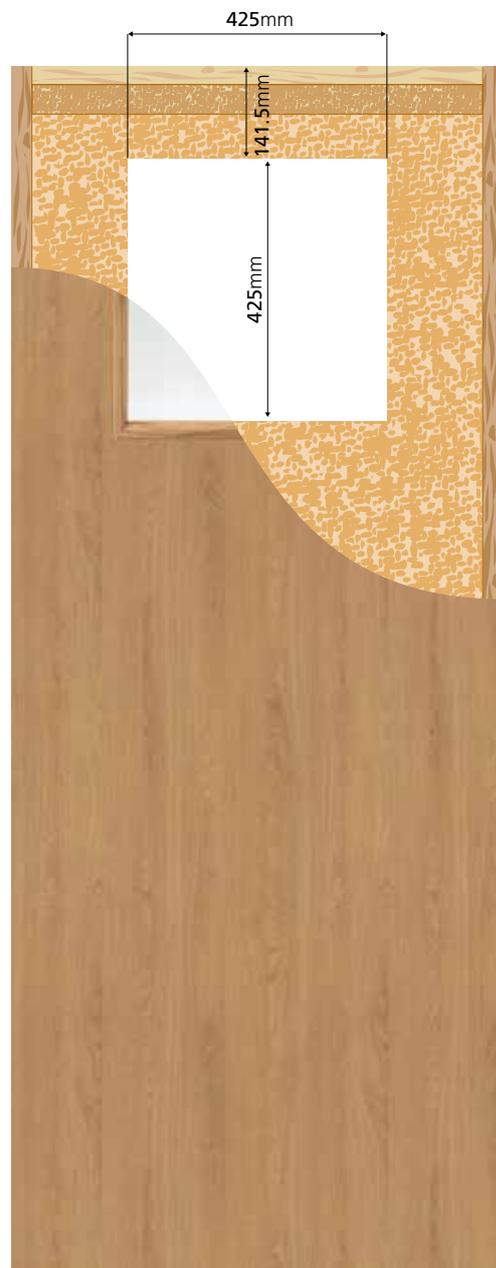

www.jeld-wen.co.uk



10 year guarantee
against manufacturing
defects

LAMINATE FLUSH DOOR

G05 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core.

Door Codes

Corbridge Oak	COFHWS+G05
Carini Walnut	CWFHWS+G05
Denver Oak	DOFHWS+G05
Sorano Oak	SOFHWS+G05
Whiteriver Oak	WOFHWS+G05
Gladstone Oak	GOFHWS+G05
FineLine Cream	FCFHWS+G05

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.


Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.

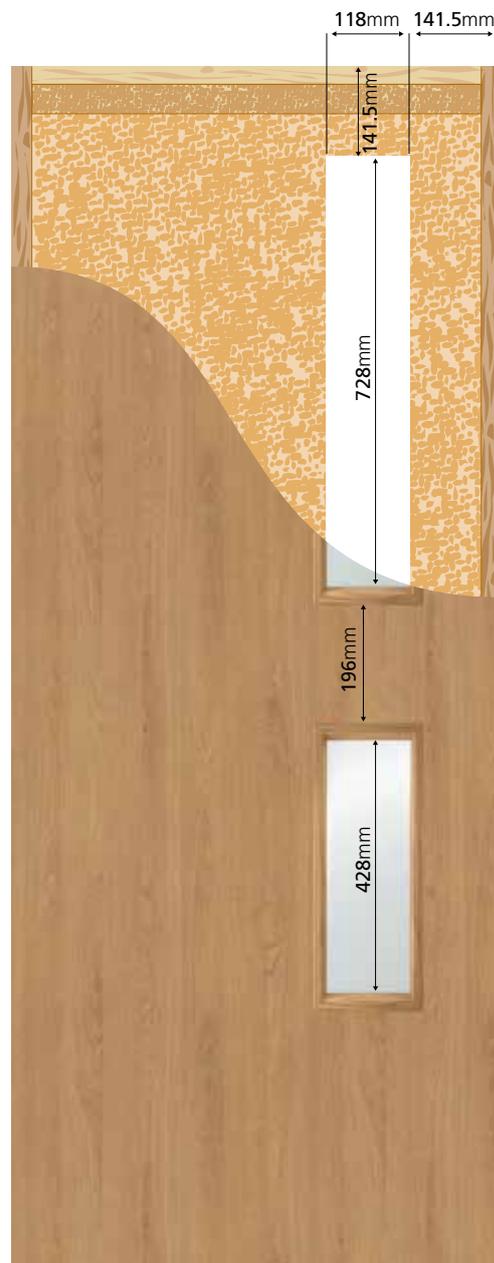

LAMINATE FLUSH DOOR

G06 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core

Door Codes

Corbridge Oak	COFHWS+G06
Carini Walnut	CWFHWS+G06
Denver Oak	DOFHWS+G06
Sorano Oak	SOFHWS+G06
Whiteriver Oak	WOFHWS+G06
Gladstone Oak	GOFHWS+G06
FineLine Cream	FCFHWS+G06

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

G07 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core.

Door Codes

Corbridge Oak	COFHWS+G07
Carini Walnut	CWFHWS+G07
Denver Oak	DOFHWS+G07
Sorano Oak	SOFHWS+G07
Whiteriver Oak	WOFHWS+G07
Gladstone Oak	GOFHWS+G07
FineLine Cream	FCFHWS+G07

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

G08 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core.

Door Codes

Corbridge Oak	COFHWS+G08
Carini Walnut	CWFHWS+G08
Denver Oak	DOFHWS+G08
Sorano Oak	SOFHWS+G08
Whiteriver Oak	WOFHWS+G08
Gladstone Oak	GOFHWS+G08
FineLine Cream	FCFHWS+G08

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

G09 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF160).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a solid flaxboard core.

Door Codes

Corbridge Oak	COFHWS+G09
Carini Walnut	CWFHWS+G09
Denver Oak	DOFHWS+G09
Sorano Oak	SOFHWS+G09
Whiteriver Oak	WOFHWS+G09
Gladstone Oak	GOFHWS+G09
FineLine Cream	FCFHWS+G09

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Flaxboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.


Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.

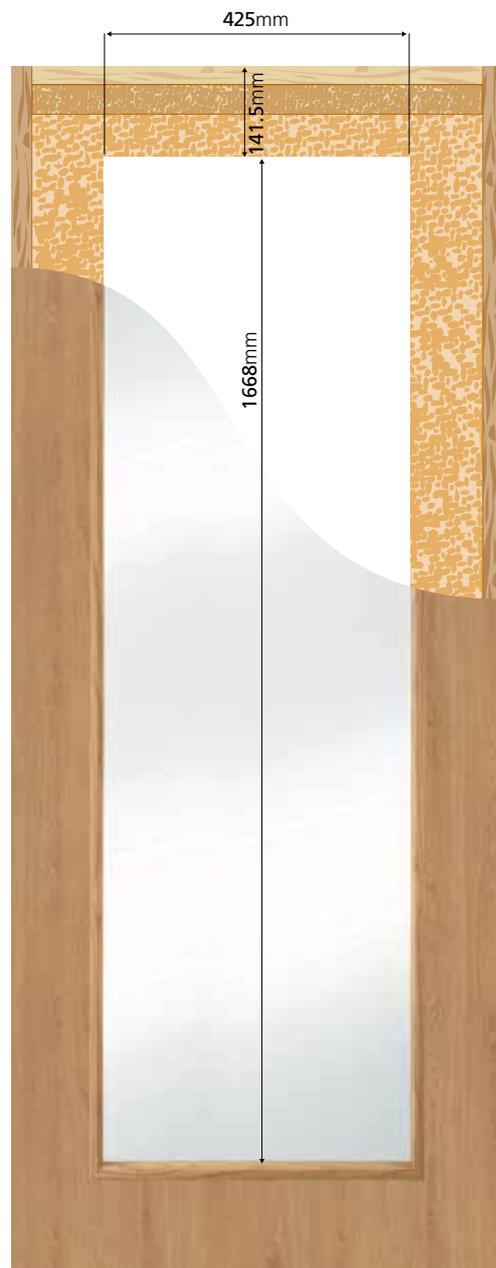

www.jeld-wen.co.uk



10 year guarantee
against manufacturing
defects

LAMINATE FLUSH DOOR

G10 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core.

Door Codes

Corbridge Oak	COFHWS+G10
Carini Walnut	CWFHWS+G10
Denver Oak	DOFHWS+G10
Sorano Oak	SOFHWS+G10
Whiteriver Oak	WOFHWS+G10
Gladstone Oak	GOFHWS+G10
FineLine Cream	FCFHWS+G10

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

G11 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core.

Door Codes

Corbridge Oak	COFHWS+G11
Carini Walnut	CWFHWS+G11
Denver Oak	DOFHWS+G11
Sorano Oak	SOFHWS+G11
Whiteriver Oak	WOFHWS+G11
Gladstone Oak	GOFHWS+G11
FineLine Cream	FCFHWS+G11

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

G12 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core.

Door Codes

Corbridge Oak	COFHWS+G12
Carini Walnut	CWFHWS+G12
Denver Oak	DOFHWS+G12
Sorano Oak	SOFHWS+G12
Whiteriver Oak	WOFHWS+G12
Gladstone Oak	GOFHWS+G12
FineLine Cream	FCFHWS+G12

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

G13 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core.

Door Codes

Corbridge Oak	COFHWS+G13
Carini Walnut	CWFHWS+G13
Denver Oak	DOFHWS+G13
Sorano Oak	SOFHWS+G13
Whiteriver Oak	WOFHWS+G13
Gladstone Oak	GOFHWS+G13
FineLine Cream	FCFHWS+G13

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



LAMINATE FLUSH DOOR

G14 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

JELD WEN®

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF192).
Glazed with CERTIFIRE approved glazing system.

Construction

Flush CPL laminate faced door, with hardwood stiles, softwood rails and a tubular chipboard core.

Door Codes

Corbridge Oak	COFHWS+G14
Carini Walnut	CWFHWS+G14
Denver Oak	DOFHWS+G14
Sorano Oak	SOFHWS+G14
Whiteriver Oak	WOFHWS+G14
Gladstone Oak	GOFHWS+G14
FineLine Cream	FCFHWS+G14

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3mm CPL Laminated HDF Skin.

Components

Stiles:	Hardwood 38mm (nominal width)
Rails (outer):	Softwood 32mm (nominal width)
Rails (inner):	Flaxboard 38mm (nominal width)
Core:	Tubular Chipboard
Lockblock:	N/A
Lipping:	N/A

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or suitable interior paint after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



www.jeld-wen.co.uk



10 year guarantee
against manufacturing
defects