

# ReadyFit™ Doorsets

## Introduction

### Internal Doorsets

In doorset form, doors are supplied pre-hung in the frame with the fixing ironmongery already fitted. The architraves and doorstops are machined to fit and sent loose, the doorset can simply be screw-fixed into the wall.

### Doorsets Specification

Supplied assembled and handed as per your order. Handing is viewed from the knuckle of the hinge as the door opens towards you (please state whether you require right or left hand when ordering). Doorsets can be delivered in house plots, with ironmongery fitted.

Architraves and doorstops are fully machined and packed with the door. Fixing brackets are pre-fitted to the side of the frames. The doorstop groove in the lining facilitates the concealed screw-fixing of the lining to the wall.

**Note:** For further information on fire resisting doorsets and acoustics please see pages 130 -131.

### Fire Doorsets

Fire doorsets are available as FD30\* with intumescent strip or FD30S\* with intumescent strip and smoke seal, fitted to the head and jambs of the lining. Door pairs are supplied unassembled for ease of handling on-site.

Minimum order quantity – 50 doorsets.




STEP 1 – LOCATE DOORSET IN DESIGNATED OPENING



STEP 2 – FIX TO PARTITION USING BRACKETS



STEP 3 – ENSURE FRAME IS SQUARE AND PLUMB



STEP 4 – INSERT GLUE INTO ARCHITRAVE GROOVE



STEP 5 – MITRED ARCHITRAVE JOINT WITH KEYWAX



STEP 6 – FIT AND FIX ARCHITRAVES IN PLACE



FINISHED DOOR INSTALLATION

### Lining width sizes

77mm, 90mm, 95mm, 100mm, 115mm, 120mm, 125mm, 130mm, 140mm, 150mm.

### Lining Thickness

25mm plus 12mm stop.  
Total thickness 37mm.

### Doorstop sizes

27mm and 71mm.


### Architraves

Ogee, Ovolo 69mm. Torus and Twice Rounded.

### Door Availability

- Moulded Panel Doors – Double Edge Banded.
- Real Wood Veneered Doors.
- Foil Veneer Doors.
- Plywood Flush Doors.
- MDF Doors.
- Hardboard Doors.

### Door Handing

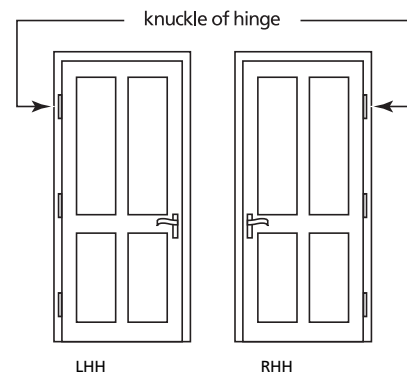

\*FD30/FD60 WHEN FITTED IN APPROPRIATE FRAME WITH INTUMESCENT STRIPS IN JAMBS AND HEAD OR TOP AND LONG EDGES OF DOOR.

# ReadyFit™ Doorsets

## Options

Six points to note before ordering JELD-WEN Doorset.

- Structural opening size
- Lining width
- Required door type
- Architrave type
- Door handing
- Ironmongery options

\*Please note: Handles are not supplied with Doorsets.

### Structural Opening Sizes

DOOR SIZE	STRUCTURAL OPENING SIZE
1981 x 457mm (6'6" x 1'6")	2036 x 522mm
1981 x 533mm (6'6" x 1'9")	2036 x 598mm
1981 x 610mm (6'6" x 2'0")	2036 x 675mm
1981 x 686mm (6'6" x 2'3")	2036 x 751mm
1981 x 762mm (6'6" x 2'6")	2036 x 827mm
1981 x 838mm (6'6" x 2'9")	2036 x 903mm
1981 x 864mm (6'6" x 2'10")	2036 x 929mm
2040 x 526mm Standard Metric	2095 x 591mm
2040 x 626mm Standard Metric	2095 x 691mm
2040 x 726mm Standard Metric	2095 x 791mm
2040 x 826mm Standard Metric	2095 x 891mm
2040 x 926mm Standard Metric	2095 x 991mm

### Ironmongery & Components

Doorsets are supplied with three 100mm hinges and are available in a choice of finishes.



GOLD EFFECT



BRIGHT NICKEL OR SATIN



WHITE

A 65mm tubular latch is supplied as standard, available in polished steel or gold effect. A 65mm bath option with thumbturn is also available. Both options are supplied with a fully adjustable keep to prevent door rattle once fitted on site.



MDF architrave is supplied foil-wrapped in white and is available in a choice of four styles. Architrave is pre-cut to length with a Hoffmann joint pre-machined.



OGEE (69 & 50MM)



TORUS (69 & 59MM)



TWICE ROUNDED (69 & 45MM)



OVOLO (69MM)