




Declaration of Performance	
DoP No. JL2022124ED-UK	
22	

		FIRE DOORSETS							
Unique identification code of the product-type:	$1 \Delta 1)V\Delta N(F-I)NFF(C)$								
or the product-type.	ECO SIDELIGHT, ECO TOPLIGHT								
Type:	Non-glazed single leaf door, glazed single leaf door								
турс.	with/with	with/without Sidelight and/or Toplight							
Intended use:	Exterior doorset for fire and/or smoke compartmentation and/or escape routes domestic and commercial locations								
Manufacturer:		ELD-WEN Sverige AB, Förrådsgatan, SE - 265 81 ÅSTORP, Sweden vww.jeld-wen.biz							
Authorised representative:		ELD-WEN UK LTD. etford Road, Woodhouse Mill, Sheffield, South Yorkshire, S13 9WH, United Kingdom							
SYSTEM 1: Certificate of constancy of performance	- an assest basis of docume initial in	<ul> <li>Approved product certification body DBI Certification UK Ltd. no. 8504 carried out:         <ul> <li>an assessment of the performance of the construction product carried out on the basis of testing (including sampling), calculation, tabulated values or descriptive documentation of the product.</li> <li>initial inspection of the manufacturing plant and of factory production control.</li> <li>continuing surveillance, assessment and evaluation of factory production control and issued the certificate of constancy of performance of the product.</li> </ul> </li> </ul>							
	AVCP System	Designated standard							
	1	Approved Body No.  A = DBI Dansk Brand- og Sikringsteknisk Institut / No. 0845	EN 16034:2014						
		$\mathbf{B} = N/A$							
Systems of Assessment and	1	C = RISE Research Institutes of Sweden AB / No. 0402							
Verification of Constancy of Performance (AVCP)		D = N/A	EN 14351-1:2006 +A2:2016						
*		E = N/A							

## JELD WEN.



Decla	red performances								
		ADVANCE-LINE ECO							
		Non-glazed single leaf door	Non-glazed single leaf door	Glazed single leaf door	Glazed single leaf door	Test laboratory			
	Resistance to fire	EI <sub>1</sub> 30	EI <sub>1</sub> 30	EI <sub>1</sub> 30	EI <sub>1</sub> 30	А			
	Smoke control	NPD	S <sub>200</sub>	NPD	S <sub>200</sub>	Α			
Ш 1	Ability to release	NPD	NPD	NPD	NPD	-			
/stei	Self-closing	NPD	NPD	NPD	NPD	-			
P Sy	Durability of ability to release	NPD	NPD	NPD	NPD				
AVC	Durability of self-closing								
	- against degradation (cycling testing)	NPD	NPD	NPD	NPD	-			
	- against ageing (corrosion)	NPD	NPD	NPD	NPD	-			
	Watertightness (Outswing)	4A	4A	4A	4A	С			
	Watertightness (Inswing)	3A / 7B <sup>1)</sup>	3A / 7B <sup>1)</sup>	3A / 7B <sup>1)</sup>	3A / 7B <sup>1)</sup>	С			
	Dangerous substances	None	None	None	None				
	Resistance to wind load	C3	C3	C3	C3	С			
Ш 3	Impact resistance	N/A	N/A	NPD	NPD	-			
/ste	Load-bearing capacity of safety devices	N/A	N/A	N/A	N/A	-			
P Sy	Height	NPD	NPD	NPD	NPD	-			
AVC	Acoustic performance	NPD	NPD	NPD	NPD				
1	Thermal transmittance	0.66 W/m²K	0.66 W/m²K	0.81 W/m²K	0.81 W/m²K	С			
	Radiation properties g:	N/A	N/A	NPD	NPD	-			
	Radiation properties LT:	N/A	N/A	NPD	NPD				
	Air permeability	4	4	4	4	С			

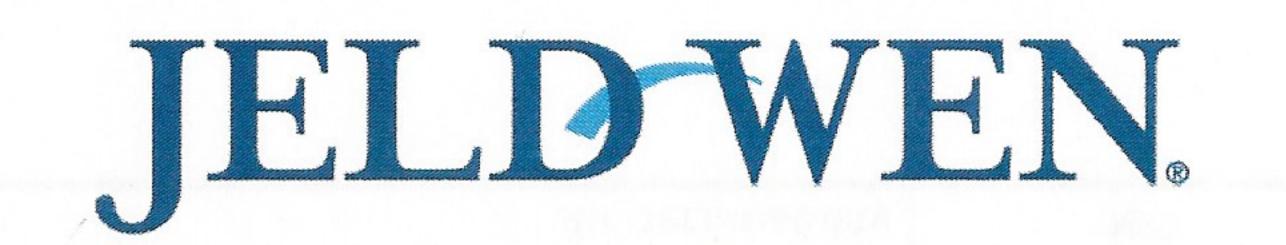



Declar	ed performances							
					NE ECO door HT / ECO TOPLIGHT			
		Non-glazed single leaf door			Glazed single leaf door			
		with sidelight	with toplight	with toplight with sidelight + toplight	with sidelight	with toplight	with sidelight + toplight	atory
		Ť				á		Test labo
	Resistance to fire	EI <sub>1</sub> 30	EI <sub>1</sub> 30	EI <sub>1</sub> 30	EI <sub>1</sub> 30	EI <sub>1</sub> 30	EI <sub>1</sub> 30	Α
	Smoke control	NPD	NPD	NPD	NPD	NPD	NPD	-
m 1	Ability to release	NPD	NPD	NPD	NPD	NPD	NPD	-
yste	Self-closing	NPD	NPD	NPD	NPD	NPD	NPD	_
P Sy	Durability of ability to release	NPD	NPD	NPD	NPD	NPD	NPD	-
	Durability of self-closing							
	- against degradation (cycling testing)	NPD	NPD	NPD	NPD	NPD	NPD	-
	- against ageing (corrosion)	NPD	NPD	NPD	NPD	NPD	NPD	-
	Watertightness (Outswing)	NPD	NPD	NPD	NPD	NPD	NPD	-
	Dangerous substances	None	None	None	None	None	None	-
	Resistance to wind load	NPD	NPD	NPD	NPD	NPD	NPD	-
3	Impact resistance	NPD	NPD	NPD	NPD	NPD	NPD	-
tem	Load-bearing capacity of safety devices	N/A	N/A	N/A	N/A	N/A	N/A	-
Syster	Height	NPD	NPD	NPD	NPD	NPD	NPD	-
VCP	Acoustic performance	NPD	NPD	NPD	NPD	NPD	NPD	-
A	Thermal transmittance	0.78 W/m²K	0.72 W/m <sup>2</sup> K	0.83 W/m <sup>2</sup> K	0.94 W/m²K	0.88 W/m²K	0.98 W/m <sup>2</sup> K	С
	Radiation properties g:	NPD	NPD	NPD	NPD	NPD	NPD	-
	Radiation properties LT:	NPD	NPD	NPD	NPD	NPD	NPD	
	Air permeability	NPD	NPD	NPD	NPD	NPD	NPD	-

## 



Declar	ed performances							
			ADVANCE-LINE ECO door with ECO SIDELIGHT / ECO TOPLIGHT					
		No	on-glazed single leaf d	oor		Glazed single leaf door		
		with sidelight	with toplight	with sidelight + toplight	with sidelight	with toplight	with sidelight + toplight	atory
						**		Test labor
	Resistance to fire	EI <sub>1</sub> 30	EI <sub>1</sub> 30	EI <sub>1</sub> 30	El <sub>1</sub> 30	EI <sub>1</sub> 30	EI <sub>1</sub> 30	Α
	Smoke control	S <sub>200</sub>	S <sub>200</sub>	S <sub>200</sub>	S <sub>200</sub>	S <sub>200</sub>	S <sub>200</sub>	_
m.	Ability to release	NPD	NPD	NPD	NPD	NPD	NPD	-
yste	Self-closing	NPD	NPD	NPD	NPD	NPD	NPD	-
P Sy	Durability of ability to release	NPD	NPD	NPD	NPD	NPD	NPD	-
AVC	Durability of self-closing							
	- against degradation (cycling testing)	NPD	NPD	NPD	NPD	NPD	NPD	-
	- against ageing (corrosion)	NPD	NPD	NPD	· NPD	NPD	NPD	-
	Watertightness (Outswing)	NPD	NPD	NPD	NPD	NPD	NPD	-
	Dangerous substances	None	None	None	None	None	None	- ,
	Resistance to wind load	NPD	NPD	NPD	NPD	NPD	NPD	
$\sim$	Impact resistance	NPD	NPD	NPD	NPD	NPD	NPD	-
tem	Load-bearing capacity of safety devices	N/A	N/A	N/A	N/A	N/A	N/A	-
Sys	Height	NPD	NPD	NPD	NPD	NPD	NPD	-
/CP	Acoustic performance	NPD	NPD	NPD	NPD	NPD	NPD	-
₹ [	Thermal transmittance	0.78 W/m <sup>2</sup> K	0.72 W/m²K	0.83 W/m²K	0.94 W/m <sup>2</sup> K	0.88 W/m <sup>2</sup> K	0.98 W/m <sup>2</sup> K	С
	Radiation properties g:	NPD	NPD	NPD	NPD	NPD	NPD	-
	Radiation properties LT:	NPD	NPD	NPD	NPD	NPD	NPD	
	Air permeability	NPD	NPD	NPD	NPD	NPD	NPD	-

## JELD WEN.



Abbreviations:

N/A = not applicable

NPD = no performance determined

 $^{1)}$  = 7B is only valid when mounted with a drop plate

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011 as it has effect in the United Kingdom, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Nigel Dilks,
VP Product Management, Europe
(Name and function)

(Place and date of issue)

(Signature)

20.12.2022.

Souhuu.

West Midhands.