SHAKER
PRIMED 4 PANEL – INTERNAL DOOR

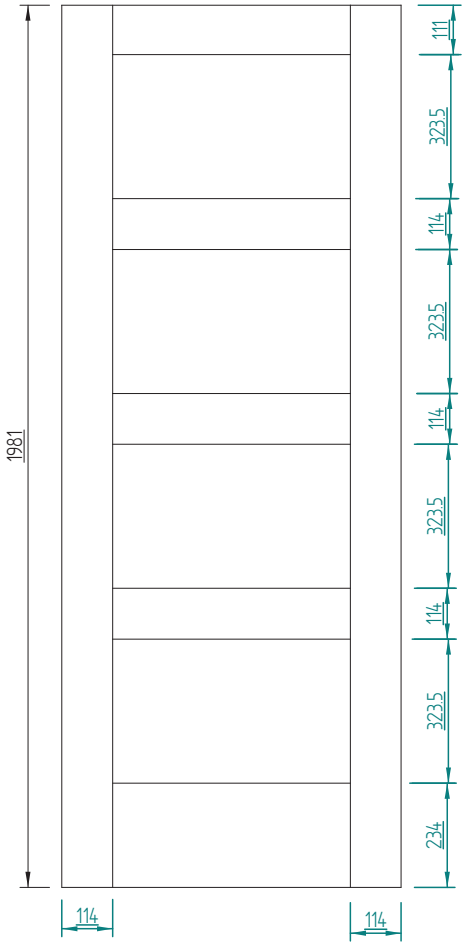

SPECIFICATIONS

Veneer Species:
MDF double coat primed

Veneer Thickness:
2.5mm

Edge Lippings:
8mm paint grade timber

Top & Bottom Lippings:
8mm paint grade timber

Panel Thickness:
9mm MDF

Profile:
90° square

Stile & Rail Core:
Particle board

Construction:
Tongue & groove joint with dowel and glue

Glazing:
N/A

Packaging:
Shrinkwrap with plastic edge corner protectors.
A4 paper fitting instruction

5 year guarantee
against manufacturing defects

www.jeld-wen.co.uk

SS/MF/JWD2343/APR16