



SECURESET FD30 FLAT ENTRANCE DOORSETS

SecureSET Doorsets are designed prodomently for the retro fit Rip and Fit market, specifically for flat and apartment entrance situations where the size of the opening is not of a standard size.

SecureSET is also available with top and side lights and in many of our popular moulded and veneer designs, these doors can be suited to other doors within the property to offer a co-ordinated and high quality look throughout.

SECURESET CERTIFICATION

The JELD-WEN SecureSet Range is Duel Third Party Certified under both the CertiFire and CertiSecure Scheme.

JELD-WEN are also proud to be members of the Secured by Design accreditation scheme, in which the SecureSET range fully complied to the latest SBD standard.

CertiFire Certificate CF5965

CertiSecure Certificate CS5059

Please visit the JELD-WEN webiste to download the latest version of these certificates

FD30 FIRE RATED

Fully tested in accordance to BS 476:Pt22 for 30 minute fire integrity and insulation. Third party certified under CF5965

SECURITY RATED

Tested and proven compliant to the PAS24 enhanced security standard. Third part certified under CS5059 & SBD accredited


ACOUSTIC PERFORMANCE

Exceeds the minimum requirement of 29dB Rw (Tested in accordance with BS EN ISO 10140-2:2021 and BS EN ISO 10140-1:2021 Annex B)

SMOKE PROTECTION

Supplied pre fitted with integrated perimeter and threshold smoke seals. (Tested in accordance with BS 476-31.1: 1983)

SEE MORE AT
JELD-WEN.CO.UK

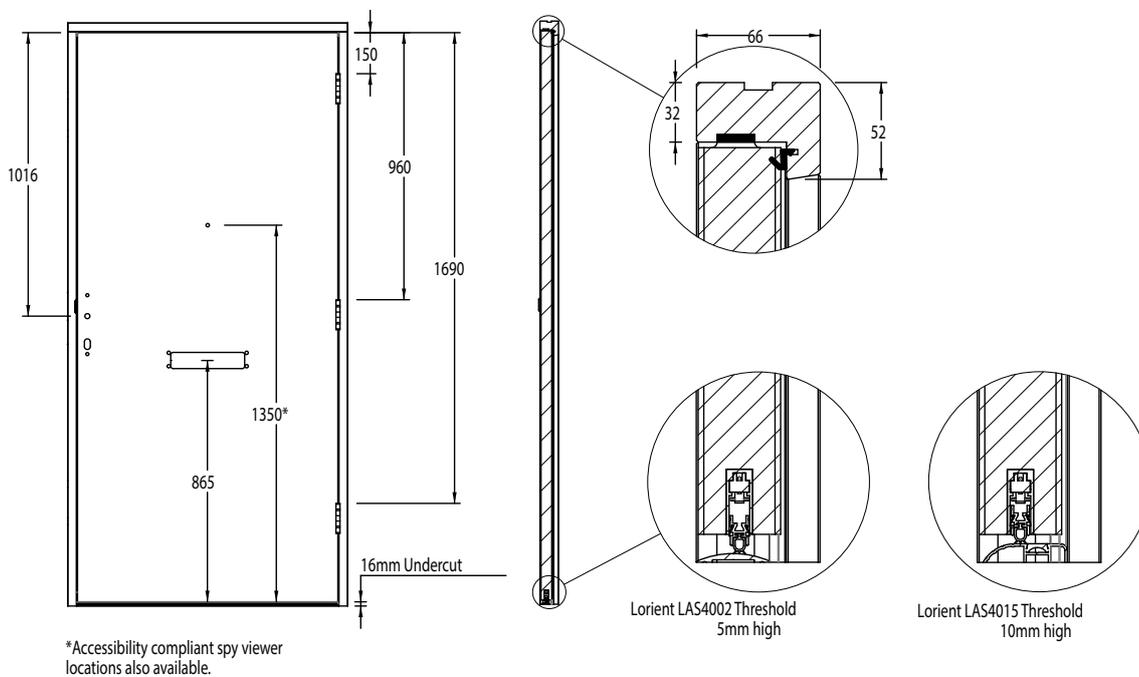

Dimensions shown on drawing detail the default hardware locations, based on standard sized flush doors. Dimensions will vary slight on Made to Measure products and moulded options to suit the design of the doorset.

SECURESET SIZE TABLE

*Recommended structural opening sizes allows for a 5mm frame to wall gap, to be filled in accordance to the guidance contained within BS 8214. Larger frame to wall gaps may be permissible, providing that the guidance contained within the BS 8214 standard is followed.

Door Leaf Size		Overall Doorset Size		Structural Opening Sizes*		Clear Opening Width
Height	Width	Height	Width	Desirable Height	Desirable Width	
1981	762	2032	832	2037	842	689
1981	838	2032	908	2037	918	765
1981	864	2032	934	2037	944	791
1981	914	2032	984	2037	994	841
2040	826	2091	896	2096	906	753
2040	926	2091	996	2096	1006	853

GENERAL DOORSET SPECIFICATION

- Pre Hung, Inwards opening FD30 & PAS24 compliant doorset.
- Pre prepared for quick and easy install on site.
- Available in a range of popular Moulded and Flush designs, including a selection of Real Wood Veneer options and bespoke colour painted finishes, including duel colour options.
- 44mm thick door leaf, made from an attack resistant timber cross laminated core.
- Available in a variety of standard imperial and metric sizes, with bespoke sizing options available to meet your requirements.
- Supplied pre installed within an engineered redwood frame, in a variety of finish options.

INTUMESCENT PROTECTION

- 20mm x 4mm Fire, Smoke & Acoustic Frame Seals
- Pre installed hinge interden protection
- Pre installed lock and keep interden protection
- Concealed overhead closer interden protection (when concealed closer option specified)

HARDWARE

- Grade 13 fire & security rated, concealed bearing hinges
- Security 3 point hook lock
- TS007 3* security rated key/thumb cylinder
- Ergonomic lever handles
- Wide angle spy viewer
- Security door chain
- Concealed drop down threshold seal

Optional Hardware

- TS008 security & fire rated letter plate
- TS007 3* security rated key/key cylinder
- Aluminium mobility threshold plates (10mm or 5mm option)
- FD30 surface mounted overhead door closer
- FD30 concealed overhead door closer
- Contemporary door knocker

Optional Hardware

