


ASTON

WHITE OAK 3 PANEL

– INTERNAL DOOR

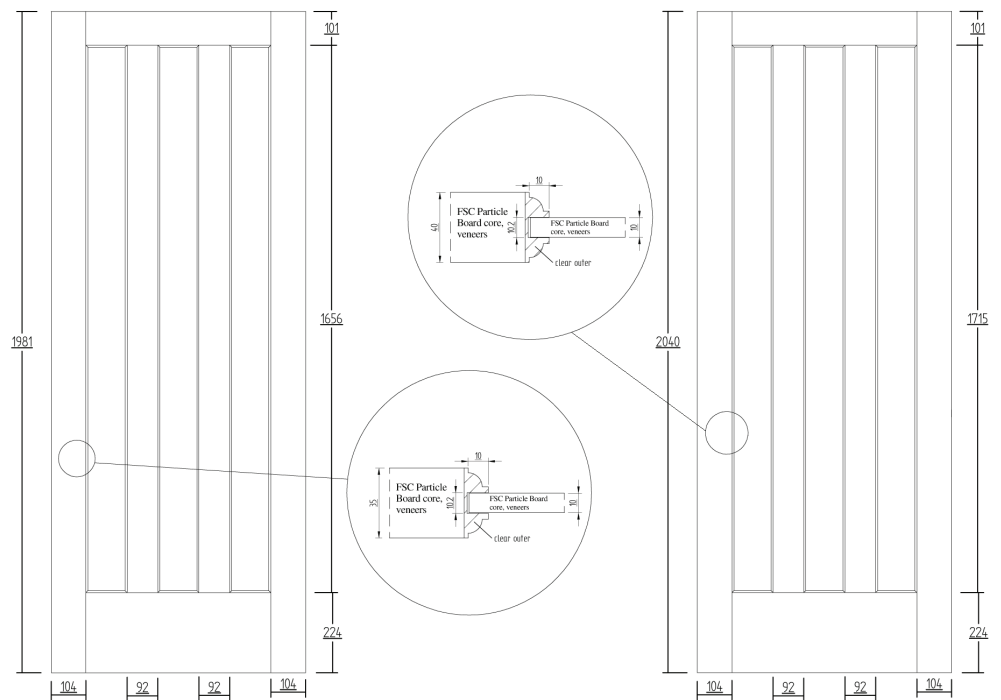

SPECIFICATIONS

Veneer Species:

American white oak

Veneer Thickness:

0.6mm

Edge Lippings:

10mm KSK

Top & Bottom Lippings:

10mm KSK

Panel Thickness:

10mm Particle board

Moulding Size & Profile:

10mm Ovolo

Stile & Rail Core:

Particle board

Construction:

Tongue & groove joint with dowel and glue

Glazing:

N/A

Packaging:

Shrinkwrap with plastic edge corner protectors.


A4 paper fitting instruction



5 year guarantee
against manufacturing
defects

ASTON

WHITE OAK 3 PANEL FD30 44mm – INTERNAL FIRE DOOR

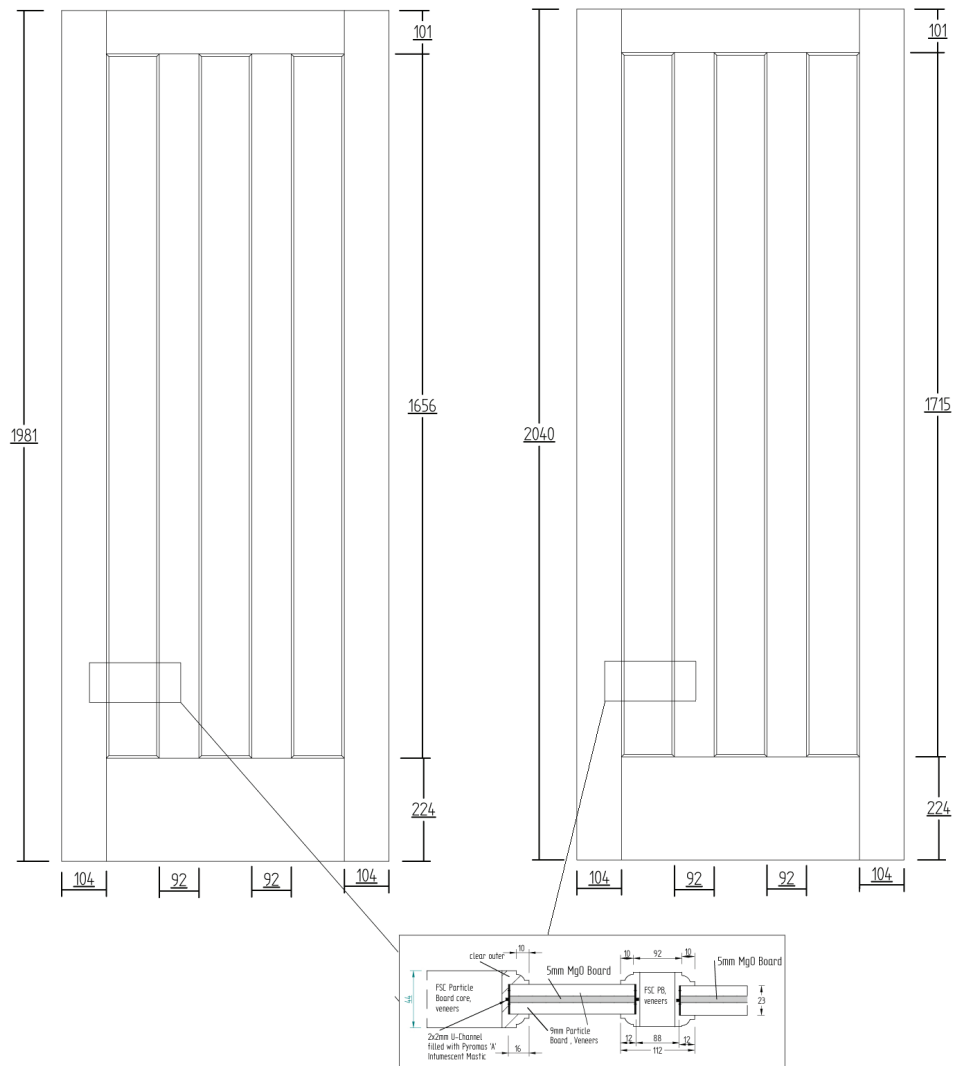

SPECIFICATIONS

Veneer Species:

American white oak

Veneer Thickness:

0.6mm

Edge Lippings:

10mm American white oak

Top & Bottom Lippings:

10mm American white oak

Panel Thickness:

23mm Particle board /
MGO board

Moulding Size & Profile:

10mm Ovolo

Stile & Rail Core:

Particle board

Construction:

Tongue & groove joint with dowel and glue

Glazing:

N/A

Packaging:

Shrinkwrap with plastic edge corner protectors.

A4 paper fitting instruction.


BWF-Certifire label to top edge



5 year guarantee
against manufacturing
defects

ASTON

WHITE OAK 3 LIGHT CLEAR/OBSCURE GLAZED – INTERNAL DOOR

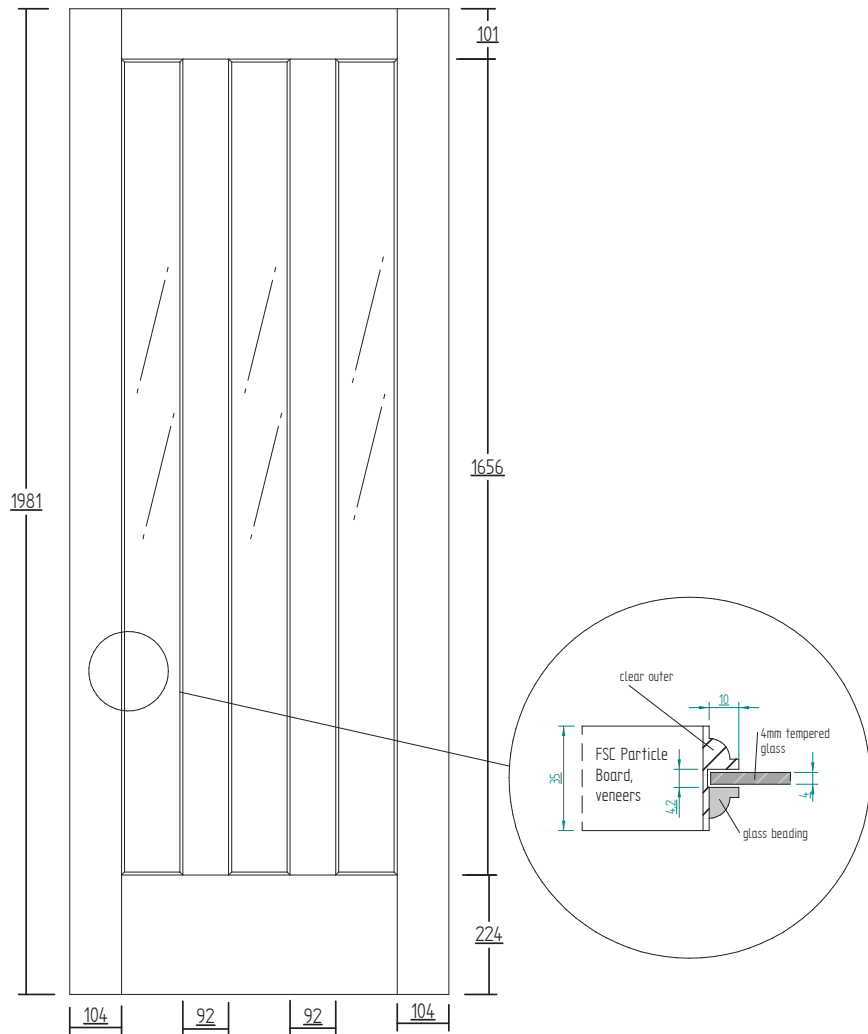

SPECIFICATIONS

Veneer Species:
American white oak

Veneer Thickness:
0.6mm

Edge Lippings:
10mm KSK

Top & Bottom Lippings:
10mm KSK

Panel Thickness:
N/A

Moulding Size & Profile:
10mm Ovolo

Stile & Rail Core:
Particle board

Construction:
Tongue & groove joint with dowel and glue

Glazing:
4mm clear or etch toughened with paint & peel film

Packaging:
Shrinkwrap with plastic edge corner protectors.
A4 paper fitting instruction



5 year guarantee
against manufacturing defects