


KNIGHTSBRIDGE

WHITE OAK CROFT GLAZED

– EXTERNAL DOOR

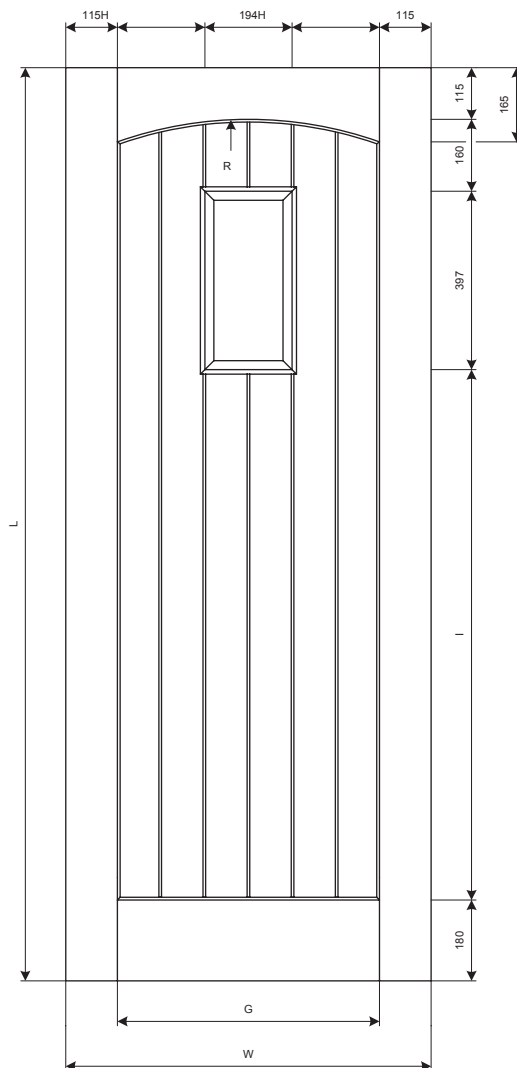

SPECIFICATIONS

Veneer Species:

American white oak

Veneer Thickness:

1.2mm

Edge Lippings:

15mm American white oak

Top & Bottom Lippings:

15mm American white oak

Panel Thickness:

44mm treated laminated pine

Moulding Size & Profile:

Half V joint, glazing bead 20mm x 22mm

Stile & Rail Core:

Treated laminated pine

Construction:

Tongue & groove joint with dowel and glue

Glazing:

16.5mm triple lead bevel with paint & peel film

Packaging:

Shrinkwrap with plastic edge corner protectors.

Particle board strips to protect raised mould

A4 paper fitting instruction



5 year guarantee against manufacturing defects



5 year guarantee against double/triple glazing unit failure