

DECLARATION OF PERFORMANCE (DoP)
No. JL2018075ED
18

1.	Unique identification code of the product type	<b>SILENCE CHARACTER, FUNCTION &amp; CLASSIC EXTERNAL DOORS/XED</b>
2.	Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4)	<b>Non-glazed single leaf door, &lt;20% glazed single leaf door, &gt;20% glazed single leaf door</b>
3.	Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification as foreseen by the manufacturer	<b>External door for domestic locations</b>
4.	Name, registered trade name or registered trademark and contact address of the manufacturer as required under Article 11 (5)	<b>JELD-WEN Latvija SIA, Rupniecibas iela 13 Aizkraukle LV-5101, Latvia www.jeld-wen.biz</b>
5.	Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2)	N/A
6.	System or systems of assessment and verification of constancy of performance of the construction product as set out in CPR, Annex V:	System 3
7.	In case of the declaration of performance concerning a construction, product covered by a harmonized standard	Notified testing laboratory, RISE Research Institutes of Sweden AB no.0402, TUV Eesti OU no. 1526, DELTA Danish Electronics, Light and Acoustics no. 0199 and VTT Expert Services Ltd no. 0537 performed the determination of the product-type on the basis of type testing (based on sampling carried out by the manufacturer), type calculation, tabulated values or descriptive documentation of the product under system 3 and issued test-/calculation reports.

8. Declared performance	Advance-Line CHARACTER							
	Silence				Silence RC3			
	Non-glazed single leaf door	<20% glazed single leaf door	>20% glazed single leaf door	Non-glazed single leaf door	<20% glazed single leaf door	>20% glazed single leaf door	>20% glazed single leaf door	Harmonized technical specification
Watertightness ( <i>Outswing</i> )	7B	7B	7B	7B	7B	7B	7B	
Watertightness ( <i>Inswing</i> )	npd	npd	npd	npd	npd	npd	npd	
Dangerous substances	-	-	-	-	-	-	-	
Resistance to wind load	npd	npd	npd	npd	npd	npd	npd	
Impact resistance	n/a	npd	npd	n/a	npd	npd	npd	
Load-bearing capacity of safety devices	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
Height	npd	npd	npd	npd	npd	npd	npd	
Acoustic performance*	41(-2;-6) dB	38(-1;-2) dB	38(-1;-2) dB	41(-2;-6) dB	39(-1;-2) dB	39(-1;-2) dB	39(-1;-2) dB	EN 14351-1:2006 +A2:2016
	43(-3;-8) dB	40(-1;-2) dB	40(-1;-2) dB	44(-3;-9) dB	41(-1;-2) dB	41(-1;-2) dB	41(-1;-2) dB	
Thermal transmittance	0,79 W/m²K	1,10 W/m²K	1,30 W/m²K	0,79 W/m²K	1,00 W/m²K	1,20 W/m²K	1,20 W/m²K	
Radiation properties g:	n/a	npd	npd	n/a	npd	npd	npd	
Radiation properties L.T:	n/a	npd	npd	n/a	npd	npd	npd	
Air permeability ( <i>Outswing</i> )	4	4	4	4	4	4	4	
Air permeability ( <i>Inswing</i> )	npd	npd	npd	npd	npd	npd	npd	

	Advance-Line FUNCTION & CLASSIC							
	Silence				Silence RC3			
	Non-glazed single leaf door	<20% glazed single leaf door	>20% glazed single leaf door	Non-glazed single leaf door	<20% glazed single leaf door	>20% glazed single leaf door	Non-glazed single leaf door	>20% glazed single leaf door
Watertightness ( <i>Outswing</i> )	7B	7B	7B	7B	7B	7B	7B	7B
Watertightness ( <i>Inswing</i> )	npd	npd	npd	npd	npd	npd	npd	npd
Dangerous substances	-	-	-	-	-	-	-	-
Resistance to wind load	npd	npd	npd	npd	npd	npd	npd	npd
Impact resistance	n/a	npd	npd	n/a	npd	npd	npd	npd
Load-bearing capacity of safety devices	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Height	npd	npd	npd	npd	npd	npd	npd	npd
Acoustic performance*	41(-2;-6) dB	37(-1;-3) dB	37(-1;-3) dB	41(-2;-6) dB	38(-1;-3) dB	38(-1;-3) dB	41(-2;-6) dB	38(-1;-3) dB
	43(-3;-8) dB	41(-1;-5) dB	41(-1;-5) dB	44(-3;-9) dB	42(-1;-5) dB	42(-1;-5) dB	44(-3;-9) dB	42(-1;-5) dB
Thermal transmittance	0,79 W/m²K	1,10 W/m²K	1,30 W/m²K	0,79 W/m²K	1,00 W/m²K	1,20 W/m²K	0,79 W/m²K	1,20 W/m²K
Radiation properties g:	n/a	npd	npd	n/a	npd	npd	n/a	npd
Radiation properties LT:	n/a	npd	npd	n/a	npd	npd	n/a	npd
Air permeability ( <i>Outswing</i> )	4	4	4	4	4	4	4	4
Air permeability ( <i>Inswing</i> )	npd	npd	npd	npd	npd	npd	npd	npd

EN 14351-1:2006  
+A2:2016



\* Top row value is for the door with single rebated frame; bottom row value is for the door with double rebated frame ("High"). Installation of doorbell, spyhole or door brake may reduce the acoustic performance by up to 1 dB.

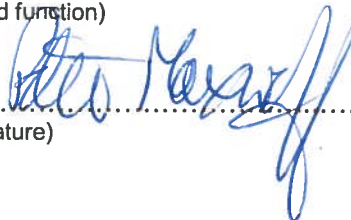
9. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Peter Maxwell, EVP & President Europe, JELD-WEN Northern Europe  
(Name and function)

SOUTHALL 12/4/18  
.....  
(Place and date of issue)

  
.....  
(Signature)