


OREGON

WHITE OAK COTTAGE HORIZONTAL GLAZED – INTERNAL DOOR

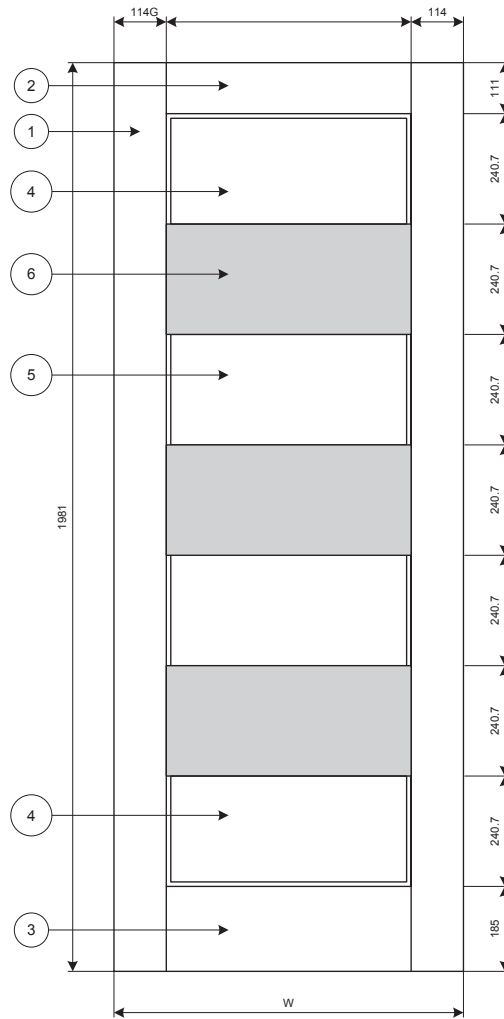

SPECIFICATIONS

Veneer Species:

American white oak

Veneer Thickness:

0.6mm

Edge Lippings:

10mm KSK

Top & Bottom Lippings:

10mm KSK

Panel Thickness:

35mm Particle board

Profile:

10mm x 5mm U groove

Stile & Rail Core:

Particle board

Construction:

Tongue & groove joint with dowel and glue

Glazing:

4mm toughened clear with paint & peel film

Packaging:

Shrinkwrap with plastic edge corner protectors.

A4 paper fitting instruction

| | | | |
|------|-----|----------------|---------------------------|
| 6 | 3 | Glass Size | 257.7 x (G + 1.7) x 5 |
| 6 | 3 | Glass Opening | 260.7 x (G + 2.0) x 5.3 |
| 5 | 2 | Middle Rail II | (G + 2.0) x 240.7 x 35 |
| 4 | 2 | Middle Rail I | (G + 2.0) x 250.7 x 35 |
| 3 | 1 | Bottom Rail | (G + 2.0) x 189 x 35 |
| 2 | 1 | Top Rail | (G + 2.0) x 114 x 35 |
| 1 | 2 | Stiles | 1988 x 114 x 35 |
| ITEM | QTY | PRODUCT CODE | SIZE |

| | | | |
|--------------|------|-----|-----|
| 29OAKHFL+GCF | 1981 | 838 | 610 |
| 26OAKHFL+GCF | 1981 | 762 | 534 |
| 23OAKHFL+GCF | 1981 | 686 | 458 |
| 20OAKHFL+GCF | 1981 | 610 | 382 |
| JWUK CODE | L | W | G |



5 year guarantee
against manufacturing
defects